

WONDERFLOOR


www.wonderfloor.co.in

ADVENTUS

PUR

**High Performance
Homogeneous Flooring**


ADVENTUS

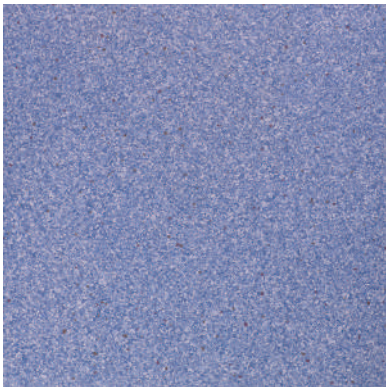


BLUE ICE




CAPPUCCINO

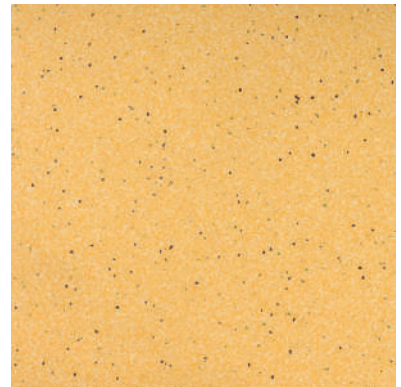


CORN

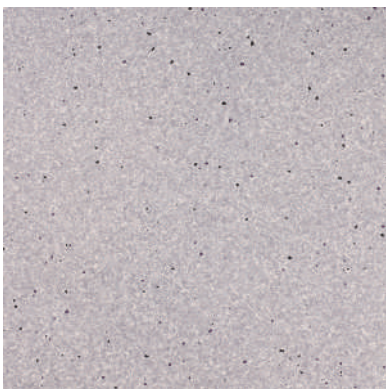


CLOUDY GREY

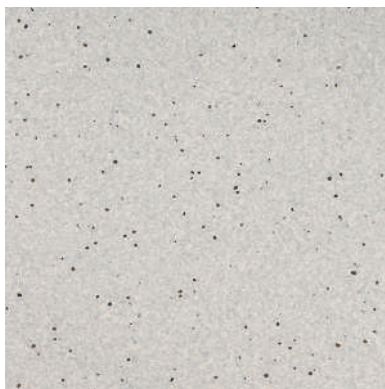


PEARL WHITE

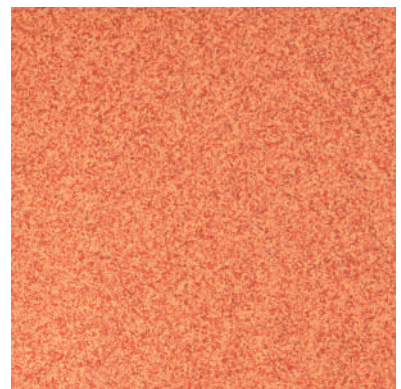

RUSTY GOLD

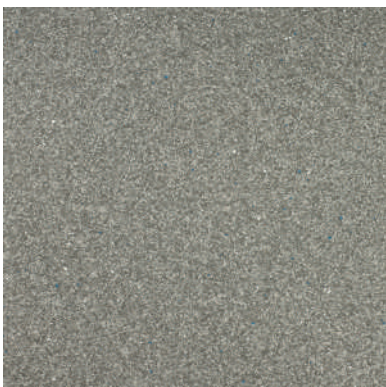

SLATE GREY

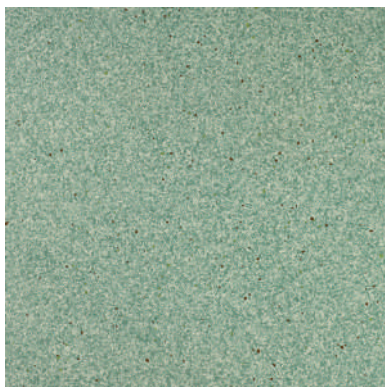

SPRING GREEN



VANILLA

SALIENT FEATURES

- High performance flooring
- Homogeneous single layered
- Non-directional design
- PUR surface guard for ease in maintenance and resistance against scratches, scuff marks & stains
- Wear group T for superior performance
- Anti bacterial / Anti fungal

APPLICATION AREAS: Hospitals, Pharmaceutical Units, Super markets, Schools, Auditoriums, Library, Large public area, Clean rooms etc.

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Adventus is a high performance product which can be used in multiple application areas with high footfall. It is easy to maintain. Adventus is non-directional and has a single layered design with multi colour chips.

PERFORMANCE CHARACTERISTICS

| CHARACTERISTICS | TEST METHOD | ADVENTUS |
|-----------------------------|------------------------|--|
| THICKNESS (mm) | EN 428 | 2.00 |
| ROLL WIDTH (mtr) | EN 426 | 2.00 |
| ROLL LENGTH (mtr) | EN 426 | 20 |
| TOTAL WEIGHT (kgs/sq mtr) | EN 430 | 3.50 |
| SURFACE PROTECTION | | PUR GUARD |
| DIMENSIONAL STABILITY | EN 434 | ≤ 0.40% |
| RESIDUAL INDENTATION | EN 433 | ≤ 0.10 mm |
| ELECTROSTATIC PROPERTIES | EN 1815 EN1081 | DOES NOT ACCUMULATE CHARGES ABOVE 2KV 10 ⁸ Ohms to 10 ¹⁰ Ohms |
| ABRASION RESISTANCE | EN 660-2/EN 649 | WEAR GROUP T |
| SURFACE SPREAD OF FLAME | BS 476 PART 7 | CLASS 1 |
| FLAMMABILITY | EN 13501-1 | Bfi-S1 |
| ANTI-BACTERIAL & FUNGICIDAL | | GOOD |
| COLOUR FASTNESS | ISO 105-BO2 | ≥ BLUE WOOL STANDARD 6 |
| SLIP RESISTANCE | DIN 51130 | R 9 |
| BEARING CASTOR CHAIR | EN 425 | SUITABLE / CONTINUOUS |
| RESISTANCE TO CHEMICALS | EN 423 | NO VISIBLE CHANGE |
| SOUND ABSORPTION | ISO 140-8/EN ISO 717-2 | Δ LW = 4db |
| PERFORMANCE CLASSIFICATION | EN 685 | 34,43 |



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com

or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com

or call : +91 9873138885 / +91 9953208740

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

